


GETTING STARTED GUIDE

STEP 1

WEB PORTAL SET UP INSTRUCTIONS

1. Go to <https://portal.docudriveeld.com/login> and login with provided credentials.

2. Click “Manage”, update your Company information, add Vehicles, Portal Users and Drivers.

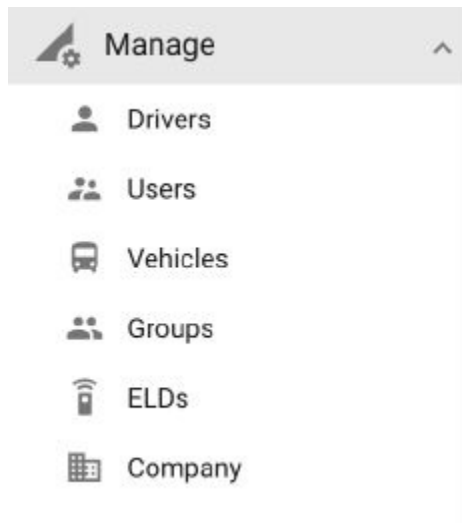

Please note: according to the FMCSA regulation **users of the portal and drivers must have DIFFERENT LOGIN credentials** even if this is the same person. Portal users are unable to log in to the DocuDrive app, and drivers are unable to log in to the portal using the same login credentials. Please use different emails for portal users and drivers.

STEP 2

ELDHARDWARE INSTALLATION INSTRUCTIONS

1. First, plug the device into the vehicle port with 9 pin cable, BEFORE turning on the vehicle and BEFORE running the DocuDrive app. Use adapters if needed (6-pin, 16-pin (some heavy-duty Volvo/Mack) and 16-pin OBD2 (light/medium-duty vehicles)). The dual fastener is provided for dash mounting.



2. You should see a slow flashing green LED, indicating that the device is powered. You should also BEFORE running the HOS app. Use adapters if needed (6-pin, 16-pin (some heavy-duty Volvo/Mack) and 16-pin OBD2 (light/medium-duty vehicles)). The dual fastener is provided for dash mounting.

3. Turn on the vehicle engine. .

4. You should see a fast flashing green LED, indicating that vehicle bus activity has been detected.


5. After the green LED becomes solid, the device is registered on the vehicle bus, and you can run the DocuDrive app.

6. From this point on, the device will have and retain the information it needs, such as VIN, to communicate with the app via Bluetooth Low Energy. Note that for power management reasons, sometimes the LEDs will not stay on.

STEP 3

DocuDrive APP SET UP INSTRUCTIONS

1. Download the “DocuDrive ELD” app from Google Play/App Store.
2. Make sure the Bluetooth of your tablet/phone is on. **DO NOT pair Bluetooth in your phone/tablet settings.** The connection will be established in the HOS app. However, if your phone/tablet prompts you or asks you for permission to turn on Bluetooth, you need to do that since Bluetooth is needed for the device to communicate with the app.
3. Log in with your credentials (created in Web Portal - please note: according to the FMCSA regulations portal users and drivers must have different login credentials even if this is the same person)
4. Select a vehicle from the list of vehicles (created in Web Portal)
5. Enter MAC address (listed on ELD device)

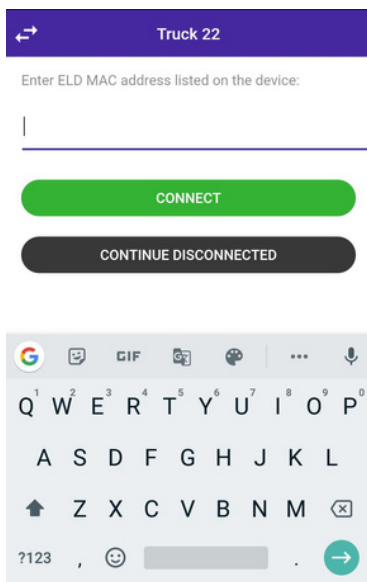

SN: 3B2000110458
MAC: **EB9D9C703E11**
CODE: 285531
FCC ID: 2ALBDPT30 **PT30**
Designed in California Assembled in China

6. Bluetooth indicator at the top right corner of the app means you are ready to start using ELD.

